

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

④ BLACK BORDERS

- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



⑪ Publication number : **0 586 168 A1**

⑫

EUROPEAN PATENT APPLICATION

⑳ Application number : 93306666.4

⑨ Int. Cl.⁶ : **C08F 4/64, C08F 10/00**

㉔ Date of filing : **23.08.93**

㉓ Priority : 04.09.92 **GB 9218814**
20.04.93 **GB 9308078**

㉒ Date of publication of application :
09.03.94 Bulletin **94/10**

㉑ Designated Contracting States :
AT BE CH DE DK ES FR GB GR IE IT LI NL PT SE

㉐ Applicant : **BP Chemicals Limited**
Britannic House 1 Finsbury Circus
London **EC2M 7BA (GB)**

㉑ Inventor : **Little, Ian Raymond c/o BP**
Chemicals Limited
Chertsey Road, Sunbury-on-Thames
Middlesex, TW16 7LN (GB)
Inventor: **McNally, John Paul, c/o BP**
Chemicals Limited
Chertsey Road, Sunbury-on-Thames
Middlesex, TW16 7LN (GB)

㉑ Representative : **Hymers, Ronald Robson et al**
BP INTERNATIONAL LIMITED Patents
Division Chertsey Road
Sunbury-on-Thames Middlesex, TW16 7LN
(GB)

㉑ Catalyst compositions and process for preparing polyolefins.

㉑ Catalyst compositions comprising both metallocene complexes having polymerisable groups and polymerization catalysts eg Ziegler-Natta may be used for the preparation of polyolefins. The catalyst compositions may ~~comprise~~ the metallocene complex in the form of a polymer and may suitably be supported on inorganic supports. Polymers having a wide range of molecular weights and comonomer distributions may be prepared by use of the catalyst compositions. Preferred metallocene complexes are zirconium complexes in which the polymerisable group is vinyl.


The present invention relates to novel catalyst compositions and their use in the polymerisation of olefins.

Metallocene complexes of Group IVA metals such as (cyclopentadienyl)₂ZrCl₂ are known as homogeneous polyolefin catalysts in the presence of a suitable co-catalyst. Such catalyst **systems** have proven to be highly active towards ethylene and alpha olefins forming narrow molecular weight distributions of polyolefins.

5 It would however be highly desirable to provide catalyst **systems** having multicomponents which may be used, particularly in the gas phase, to prepare polymers having a wide molecular weight distribution.

We have now found that **metallocene** complexes having a polymerisable group may be used advantageously together with one or more polymerisation catalyst as components in catalyst compositions suitable for the polymerisation of olefins.

10 Accordingly, the present invention provides a catalyst composition comprising at least one polymerisation catalyst and at least one **metallocene** complex, said **metallocene** complex having the general formula I or II



20 wherein R is a univalent or divalent i-20C hydrocarbyl, or a 1-20C hydrocarbyl containing Substituent oxygen, Silicon, phosphorus, nitrogen or boron atoms with the proviso that at least one R group contains a polymerisable group and preferably contains at least three carbon atoms and when there are two or more R groups present they may be the same or different, and when R is divalent it is directly attached to M, and replaces a Y ligand, wherein

25 X is an organic group containing a cyclopentadienyl nucleus,

M is a Group IVA metal,

Y is a univalent anionic ligand and

for formula I,

n is an integer of 1 to 10

30 x is either 1 or 2, and

when x = 1, p = 0 - 3, that is, when all R are univalent, p = 3; when one R is divalent, p = 2, when two Rs are divalent, p = 1 and when three Rs are divalent, p = 0,

when x = 2, p = 0-2, that is, when all R are univalent, p = 2; when one R is divalent, p = 1 and when two Rs are divalent, p = 0, and for formula II,

35 n, m and l are integers or 0 such that n + m + l ≥ 1, p = 0-2, that is, when all R are univalent, p = 2; when one R is divalent, p = 1 and when two Rs are divalent, p = 0, and

Z is a C₁ to C₄ alkylene radical or a dialkyl germanium or silicon or an alkyl phosphine or amine radical or bis-dialkylsilyl or bis dialkylgermanyl containing hydrocarbyl groups having 1 to 4 carbon atoms bridging the cyclopentadienyl nuclei.

40 The present invention provides a novel catalyst composition which comprises one or more polymerisation catalysts and one or more **metallocene** complexes wherein the **metallocene** complexes contain at least one polymerisable group.

The catalyst composition comprises an olefin addition polymerisation catalyst which may suitably be a Group IVA, VA or VIA metal catalyst (Ti, Zr, Hf, V or Cr) eg a metal oxide or metal organometallic compound such as a **metallocene**. Alternatively, the polymerisation catalyst may be a supported Ziegler Natta catalyst, 45 for example, TiCl₄ supported on MgCl₂. The preferred polymerisation catalyst is a Ziegler Natta catalyst.

The Ziegler Natta catalyst comprises titanium and halogen, usually chloride and preferably also magnesium. The catalysts have a titanium component which may be in a 3 and/or 4 valency and as a co-catalyst an organoaluminium compound. They and their preparation are well described in the literature. Generally the titanium component is of formula TiCl₄ (OR)_{4-n}, where R represents alkyl, eg of 1-6 carbons, such as titanium tetrachloride, tetra ethyl or propyl titanate or mixtures thereof. 50

The titanium component may be impregnated onto a support, eg silica or alumina, or magnesium chloride, which may be in the form of particles or as a coating itself on a support, eg silica or alumina. The magnesium chloride particles may be of 1 0-1 00 microns and may be made by grinding larger particles. However, preferably 55 they are substantially spherical and made by reacting an organomagnesium compound with an alkyl chloride or hydrogen chloride in an anhydrous solvent such as an aliphatic hydrocarbon; especially the latter reaction is performed in the presence of an electron donor such as an alkyl ether such as dibutyl ether and/or aromatic carboxylate ester such as ethyl p-toluate and provides a magnesium chloride support also containing electron

donor. **Alternatively**, Ziegler Natta catalysts may be made by coprecipitation of titanium and magnesium alkoxy halide from a mixture in an organic anhydrous solvent of titanium ~~tetrachloride~~/tetraalkyl titanate and a magnesium alkoxy compound.

The metallocene complex of the present invention is a Group IVA metallocene of general formula I or II wherein M is suitably hafnium, zirconium or titanium. Preferably, M is zirconium.

In the metallocene complex of general formula I or II, X comprises a cyclopentadienyl nucleus. Suitably X represents a **single** ring cyclopentadienyl nucleus or a **fused** ring one such as indenyl or tetrahydroindenyl or **fluorenyl nucleus**. Preferably X is the cyclopentadienyl nucleus.

In the metallocene of general formula I or II when there are two or more R groups present these may be the **same** or may be different. At least one of R contains the polymerisable group, especially an olefinic group.

The R groups of the metallocene complex are independently organic hydrocarbyl groups, at least one of the R groups having a polymerisable group. For the purposes of the present invention, a polymerisable group may be defined as a group **which can** be incorporated into a growing polymer chain. The preferred **polymerisable** group of **which** R consists or comprises is an olefinic group. Preferably, the olefinic group consists of or comprises a **vinyl** group.

R may independently be an alkenyl group of suitably 2 to 20, preferably 3-20 especially 3-6 **carbon** atoms. The alkenyl may suitably be linear or **branched**, for example, an alkenyl group such as but-3-enyl or oct-7-enyl; or an alkenyl aryl, alkenyl cycloalkyl or alkenyl aralkyl group, **each** having 6 to 20 **carbon** atoms, especially **p-vinyl phenyl** or **p-vinyl benzyl**.

Additionally, one of the R groups may be a silyl group such as **trimethyl silyl**, triethyl silyl, ethyl dimethyl silyl, methyl diethyl silyl, phenyldimethyl silyl, methyl diphenyl silyl, triphenyl silyl and the like.

R may also represent an organic hydrocarbyl group such as an **alkyl** group of 1 to 10 **carbon** atoms such as methyl, ethyl, propyl hydrocarbyl groups or a cycloalkyl group containing 5 to 7 **carbon** atoms, for example, cyclohexyl or an **aromatic** or aralkyl group of 6 to 20 or 7 to 20 **carbon** atoms respectively, for example, phenyl or **benzyl**.

m and n are at least 1 and not greater than 10, eg 1-5, the maximum value depending on the number of possible Substituent positions available in the X nucleus. Where for example X is cyclopentadienyl, the **maximum** for n is 5 whilst the maximum of n is 7 for the indenyl nucleus.

Y is a univalent anionic ligand. Suitably the ligand is selected from hydride, **halides**, for example, **chloride** and bromide, substituted hydrocarbyls, unsubstituted hydrocarbyls, alkoxides, amides or phosphides, for example, a dialkylamide or a dialkyl or **alkyl aryl** Phosphide group with 1 to 10 **carbon** atoms in **each alkoxide** or **alkyl** group and 6 to 20 carbons in the aryl group.

The preferred catalyst **composition** of the present invention comprises a Ziegler-Natta catalyst and a metallocene complex of general formula I wherein:

M is zirconium
R is **C₃ to C₁₀** hydrocarbyl with a **vinyl** group
X is a cyclopentadienyl group
Y is **chloride** and
n is 1 or 5
x is 2, and
p is 2.

The preferred catalyst **composition** may also **comprise** a Ziegler-Natta catalyst and a metallocene complex of general formula II wherein:

M is zirconium
R is **C₃ to C₁₀** hydrocarbyl with a **vinyl** group
X is an indenyl group
Y is **chloride**
n = m = 1
l = 0, and

Z is a **C₁ to C₄ alkylene** or a bis dimethylsilyl containing **C₁ to C₄** hydrocarbyl group.

Examples of suitable metallocene **complexes** of general formula I and general formula II are illustrated in the attached **Figures 1 and 2** respectively.

Metallocene complexes of general formula I, where x = 2, and general formula II may suitably be prepared by reacting a suitable group IVA metal salt of the general formula MYCl₂ with a compound with a polymerisable group containing a cyclopentadienyl anion of the general formula [(R)_nX]M' or [R_nX-ZR_n]M'₂. Suitably the M' is an **alkaline** metal. It is preferred that the Group IV metal salt is a tetra halide salt, most preferably a **tetrachloride salt**. It is preferred that the preparation of the metallocene complex is **carried out** in the presence of an anhydrous organic solvent such as an aliphatic ether such as diethyl ether or an **aromatic hydrocarbon**.

such as toluene or a cyclic ether such as tetrahydrofuran and **under** an inert atmosphere. The preferred conditions are in the presence of dry tetrahydrofuran and **under dry nitrogen**.

If a metallocene complex is to be prepared in which the R groups are different then for formula (I) where $x = 2$ two different $[(R)_nX]M'$ compounds are used and for formula II, the appropriate mixed compound is **used**.

5 The salt of general formula $[(R)_nX]M'$ (III) may be prepared by any suitable method from the corresponding compound of formula $(R)_nXH$ (IV) by reaction with a suitable metal. Suitably, the metal is an **alkaline** metal selected from lithium, sodium or potassium. The metal may also be an organo hydrocarbyl alkali metal **compound** such as an **alkyl** or phenyl sodium, lithium or potassium compound. Preferably, it is a lithium compound.

10 The compound $(R)_nXH$ may itself be formed by reaction of a compound of general formula XM'' (V) where M'' is an alkali metal. Suitably XM'' is sodium cyclopentadienide. XM'' may be reacted with a compound $R-R''$ where R is as defined above and R'' is a suitable leaving group. **Alternatively**, XM'' and $X'M''$ may be reacted with $Z(R)_tR''_2$. R'' may suitably be a nucleophilic leaving group. Preferably, R'' is a halide selected from **chloride**, bromide or iodide, an ester group, especially a sulphonate ester such as alkane sulphonate or aryl **sulphonate**. Suitably, the aforementioned **reactions** are **carried out** in the presence of an anhydrous **organic** solvent and **under** an inert atmosphere.

15 Where it is desired to prepare the metallocene complex of general formula I wherein x is 1, the complex may suitably be prepared using procedures well known in the field. For example, the cyclopentadiene compound $X(R)_nH$ could be reacted with a metallating agent where the metal (M'') is a Group I alkali metal to provide $X(R)_nM''$. Metallating agents include $n-BuLi$ or $MeLi$. Suitably $X(R)_nM''$ is then reacted with trimethylsilyl chloride in an appropriate solvent to provide $(Me_3Si)X(R)_n$. Further reaction with a Group IV metal halide will suitably provide a metallocene complex of general formula $M[X(R)_n]Y_3$. This Synthesis is particularly preferred for the preparation of the titanium metallocene, although variations of the Synthesis can be used to prepare analogous zirconium and hafnium **complexes**. In another example, if $X(R)_n$ contains one or more functional groups with a protonated heteroatom, additional equivalents of the metallating reagent will deprotonate both the **cyclopentadiene nucleus** and one or more of the heteroatoms. Reaction of the metallated polyanion with a Group IV metal halide will suitably provide a metallocene complex of general formula $M[X(R)_n]Y_t$, where Y is halide and $t = 0 - 2$. In this **case**, $(3 - t)$ R groups will bridge the cyclopentadienyl **nucleus** and the metal atom by means of a bond between the metal atom and a deprotonated heteroatom.

20 If desired the **complexes** of formula I or II wherein Y is halide may be converted into the **complexes** of formula I or II wherein Y is one of the other specified groups by reaction of the halide with an appropriate **nucleophile** eg alkoxide.

25 The metallocene **complexes** of general formula I and/or II, and/or the polymerisation catalyst of the catalyst composition of the present invention may suitably be supported on an inorganic support to provide a supported catalyst which provides another **aspect** of the invention. Any suitable inorganic support may be used, for **example**, inorganic **oxides** such as silica, alumina, silica-alumina mixtures, thoria, zirconia, magnesia, titania and **mixtures** thereof. Equally suitably inorganic halides may be used. Suitable halides include group IIA halides, e.g. magnesium **chloride**. The complex of formula I or II preferably comprises 0.01 - 50% by weight of said supported catalyst **composition**.

30 The metallocene complex and/or the polymerisation catalyst may suitably be impregnated onto the support material **under** anhydrous conditions and **under** an inert atmosphere. The solvent may then be evaporated **under** reduced pressure. The impregnated support may then be heated to remove any remaining solvent.

35 The metallocene **complexes** of general formula I and/or II may also be incorporated into a polymer which may be combined with a polymerisation catalyst as defined above to generate a catalyst **composition** according to another **aspect** of the present invention. The metallocene containing polymer usually contains a high group IVA metal content and is usually a low yield polyolefin, comprising one or more metallocene **complexes** of general formula I and/or II with one or more **olefins**.

40 The metallocene containing polymer may suitably be prepared by heating one or more metallocene **complexes** of formula I and/or II usually in the presence of an inert solvent and/or suitable co-catalysts as described **further below** and preferably in the presence of one or more alpha-olefins or ethylene, so that the metallocene complex is co-polymerised. Suitably, the alpha-olefin may be a C3 - C10 **olefin**.

45 The metallocene containing polymer and the polymerisation catalyst may suitably be impregnated onto the support material **under** anhydrous conditions and **under** an inert atmosphere. The impregnation can be conducted using an inert solvent in which **case** the solvent may then be evaporated **under** reduced pressure. The impregnated support may then be evaporated **under** reduced pressure. The impregnated support may then be heated to remove any remaining solvent. Preferably, the metallocene containing polymer is dissolved in the inert solvent. Suitable inert solvents include **aromatic** hydrocarbons, such as toluene. **Alternatively**, and equally applicably, the metallocene containing polymer may be impregnated onto a supported polymerisation catalyst.

50 In another **aspect** of this invention, a catalyst **composition** containing a polymerisation catalyst and met-

allocene containing polymer may be prepared in one **step**. In this **case**, one or more metallocene complexes of formula I and/or II are combined with one or more polymerisation catalysts as described above under conditions in which the polymerisable group of the metallocene is incorporated into a polymer. Preferably, the polymerisation will be conducted in the presence of one or more alpha-olefins or ethylene so that the metallocene is copolymerised. Suitably, the alpha-olefin may be a C3 - C10 olefin. The polymerisation catalyst is optionally and preferably supported. In this aspect of the invention, the catalyst component responsible for forming the metallocene containing polymer could be the metallocene or the polymerisation catalyst or a combination of the two. Suitably, one or more co-catalysts are present for the formation of the metallocene containing polymer.

It is a particular advantage of this aspect of the present invention that an active catalyst composition comprising a metallocene containing polymer may be supported on an inorganic oxide or metal halide support with a polymerisation catalyst without using cocatalysts such as aluminoxanes as the means of support. Aluminoxanes are expensive and difficult to handle and it is desirable to minimise their use. Conventionally, they are used as both a means of binding metallocenes to inorganic supports and as cocatalysts. The current invention obviates the need for aluminoxanes as a means of binding. This allows their use as cocatalysts only or not at all by selecting alternative cocatalysts, eg. Bronsted or Lewis acids.

A further advantage of this aspect of the current invention is that it provides a support method which prevents desorption of metallocene complexes from a supported catalyst under certain polymerisation process conditions, eg slurry. Conventional metallocene support methods where the metallocene complex is simply adsorbed onto the support surface, with or without the use of cocatalysts such as aluminoxanes, may undergo some metallocene complex desorption under polymerisation process conditions.

The conditions of formation of the polymer are substantially similar to those for the polymerisation described hereafter, but with a lower degree of polymerisation, eg for a shorter time.

The catalyst compositions of the present invention may be used as catalysts in the polymerisation of olefins, particularly ethylene. The catalyst composition may contain at least two classes of active site namely that due to the metallocene and that due to the polymerisation catalyst.

If desired, both classes of active site may be retained during the olefin polymerisation reaction to provide a final polymer comprising polyolefins with differing molecular weight and/or branch distribution. Such polymers may, for example, have a multi-modal molecular weight distribution. Alternatively, one type of active site in the catalyst composition may be deactivated prior to use in the polymerisation reaction, the resulting polyolefin having a more uniform molecular weight and/or branch distribution. The latter option may be achieved by, for example, selectively deactivating the active site of the polymerisation catalyst by chemical treatment or choosing a polymerisation catalyst and/or conditions which give rise to low polymerisation activity relative to that of the metallocene sites. Alternatively, the relative proportions of the catalytically active components of the catalyst composition may be chosen to adjust the polymerisation catalyst activity to give the desired polymer properties.

When used for the polymerisation of olefins the catalyst compositions of the present invention are employed in combination with a cocatalyst.

The catalyst compositions may therefore comprise a suitable co-catalyst. Suitably the co-catalyst is an organometallic compound having a metal of Group IA, IIA, IIB or IIIB of the periodic table. Preferably, the metals are selected from the group including lithium, aluminium, magnesium, zinc and boron. Such co-catalysts are known for their use in polymerisation reactions, especially the polymerisation of olefins, and include organo aluminium compounds such as trialkyl, alkyl hydrido, alkylhalo and alkyl alkoxy aluminium compounds. Suitably each alkyl or alkoxy group contains 1-16 carbons. Examples of such compounds include trimethylaluminium, triethylaluminium, diethyl aluminium hydride, triisobutyl aluminium, tridecyl aluminium, tridodecyl aluminium, diethyl aluminium methoxide, diethyl aluminium ethoxide, diethyl aluminium phenoxide, diethyl aluminium chloride, ethyl aluminium dichloride, methyl diethoxy aluminium and methyl aluminoxane. The preferred compounds are alkyl aluminoxanes, the alkyl group having 1 to 10 carbon atoms, especially methyl aluminoxane. Where Y in the general formula I or II is independently hydrogen or hydrocarbyl, suitable co-catalysts also include Bronsted and Lewis acids. These cocatalysts may also be used to prepare metallocene containing polymer.

The catalyst composition may suitably comprise one or more cocatalysts. Suitably, two different cocatalysts are present, for example, one selected for the polymerisation catalyst, for example, trialkyl aluminium and a second for the metallocene complex, for example, alkyl aluminoxane. Suitably the amount of co-catalyst for mixing with the metallocene of formula I or II is such as to provide an atom ratio of M from the metallocene to the metal of the co-catalyst of 1-10,000:10,000-1 in the case of aluminoxanes and 1-100:100-1 otherwise.

Suitably, where one or more active sites needs a cocatalyst, the co-catalyst or co-catalysts may be added at different times and in different orders of addition to obtain different products.

The catalyst composition of the present invention may be prepared and then transferred under inert con-

ditions to an olefin polymerisation reactor. Alternatively, the catalyst composition may be prepared in-situ in the polymerisation chamber.

The present invention therefore provides a process for the production of polyolefins, in particular homopolymers of ethylene and copolymers of ethylene with minor amounts of at least one C3 to C10, preferably C3 to C8 alpha-olefin. The process comprises contacting the monomer or monomers, optionally in the presence of hydrogen, with an olefin polymerisation catalyst composition according to any aspect of the present invention at a temperature and pressure sufficient to initiate the polymerisation reaction. Suitably the alpha olefin may be propylene, butene-1, hexene-1, 4-methylpentene-1 and octene-1 and may be present with the ethylene in amounts of 0.001-80% by weight (of the total monomers). The polymers or copolymers of ethylene thus obtained can have densities, in the case of homopolymers of about 950 to 960 or 965 kg/m³ or in the case of copolymers, as low as 915 kg/m³ or even lower eg less than 900 kg/m³. The C3 to C8 alpha-olefin content in the copolymers of ethylene can be about from 0.01% to 10% by weight or more.

The olefin polymerisation catalyst according to the present invention can be used to produce polymers using solution polymerisation, slurry polymerisation or gas phase polymerisation techniques. Methods and apparatus for effecting such polymerisation reactions are well known and described in, for example, *Encyclopaedia of Polymer Science and Engineering* published by John Wiley and Sons, 1987, Volume 7, pages 480 to 488 and 1988, Volume 12, pages 504 to 541. The catalyst according to the present invention can be used in similar amounts and under similar conditions to known olefin polymerisation catalysts.

The polymerisation may optionally be carried out in the presence of hydrogen. Hydrogen or other suitable chain transfer agents may be employed in the polymerisation to control the molecular weight of the produced polyolefin. The amount of hydrogen may be such that the percentage of the partial pressure of hydrogen to that of olefin(s) is from 0.01-200%, preferably from 0.0510%.

Typically, the temperature is from 30 to 110°C for the slurry or "particle form" process or for the gas phase process. For the solution process the temperature is typically from 100 to 250°C. The pressure used can be selected from a relatively wide range of suitable pressures, e.g. from subatmospheric to about 350 MPa. Suitably, the pressure is from atmospheric to about 6.9 MPa, or may be from 0.05-10, especially 0.14 to 5.5 MPa. In the slurry or particle form process the process is suitably performed with a liquid inert diluent such as a saturated aliphatic hydrocarbon. Suitably the hydrocarbon is a C₄ to C₁₀ hydrocarbon, e.g. isobutane or an aromatic hydrocarbon liquid such as benzene, toluene or xylene. The polymer is recovered directly from the gas phase process or by filtration or evaporation from the slurry process or evaporation from the solution process.

The catalyst compositions of the present invention are particularly suitable for use in the gas phase.

By using the catalyst compositions of the present invention broad molecular weight polymers may be produced using a single catalyst in which the metallocene component produces one molecular weight range polymer and the polymerization catalyst eg Ziegler produces another.

Such broad molecular weight polymers are preferred for certain products for example high strength pipe, blow moulding, tough film, etc wherein the strength is derived from the high molecular weight component and processability from the low molecular weight component without which the polymer is generally too viscous to be conveniently extruded.

It is also possible to obtain variations in comonomer distribution as a function of molecular weight by using catalyst components with different comonomer incorporation rates.

The combined catalyst compositions offer the potential to achieve a wide range of molecular weight and comonomer distributions and to produce easily processable polymer grades for example high strength film grades.

45 Melt Index Measurement

The Melt Index (MI) of the polymers produced was determined according to ASTM D1238 Condition E, 2.16 kg at 190°C while the High Load Melt Index (HLMI) was according to ASTM D1238 condition F, 21.6 kg at 190°C.

50 Method for Measuring the Molecular Weight Distribution

The molecular weight distribution of a (co)polymer is calculated according to the ratio of the weight-average molecular weight, Mw, to the number-average molecular weight distribution curve obtained by means of a "WATERS" (trademark) model "150 C" gel permeation chromatograph (High Temperature Size Exclusion Chromatograph), the operating conditions being the following:

- solvent: 1,2,4-trichlorobenzene;
- solvent flow rate: 1.0 ml/minute;

- three "SHODEX" (trademark) model "AT 80 MS" columns of 25 cm length are employed;
- temperature: 145°C;
- sample concentration: 0.1% by weight;
- injection volume: 500 microlitres;
- Universal Standardisation using monodisperse polystyrene fractions.

The present invention will now be further illustrated with reference to the following examples:

All of the reactions and purifications detailed below involving organometallic species were carried out under a dry nitrogen atmosphere using standard vacuum-line techniques. Tetrahydrofuran and diethyl ether were dried over sodium benzophenone ketyl and distilled. Toluene was dried over sodium-potassium and distilled. Dichloromethane was dried over 4Å molecular sieves. All of the reagents were used as received.

Example 1: Preparation of Bis(3-butenylcyclopentadienyl)zirconium Dichloride

Step (a) Preparation of 3-buten-1-tosylate

To a solution of 100 g (525 mmol) p-toluenesulphonyl chloride in 200 ml of dry pyridine cooled to 0°C was added 21.1 g (29.3 mmol) 3-buten-1-ol. The reaction solution was thoroughly mixed and allowed to stand in a refrigerator at -5°C overnight. The reaction mixture was then poured with stirring into 200g of ice/water. The oily tosylate product was extracted from the aqueous mixture with 3 x 300 ml aliquots of ether. The combined ethereal fractions were washed twice with 300 ml of cold aqueous hydrochloric acid (conc HCl:water 1:1 w/w) to remove pyridine and then with 300 ml water, dried over potassium carbonate and sodium sulphate and decolourised with activated carbon. The suspension was filtered and the ether evaporated from the filtrate under reduced pressure to leave a pale yellow oil. The oil was then washed with cold pentane to remove impurities and induce crystallisation. 51.0 g of spectroscopically pure product (¹H NMR) as a microcrystalline white solid were isolated (225 mmol, 76.7%).

Step (b) Preparation of 3-butenylcyclopentadiene

To a solution of 25.0 g (110 mmol) 3-buten-1-tosylate prepared according to step (a) above in 200 ml THF cooled to 0°C was added 66.9 ml of 2.0 M (136 mmol) sodium cyclopentadienylide in THF. The reaction mixture was allowed to warm to room temperature and was stirred for 16 h. 100 ml concentrated aqueous saline solution was added and the product extracted with ether (3 x 75 ml). The combined organic fractions were dried over magnesium sulphate for 2 hours, filtered and the solvents removed under reduced pressure using a rotary evaporator to yield a dark brown oil. The crude product was distilled under reduced pressure (b.p. 50-51°C @ 15 mm Hg) to give 5.71 g of a colourless oil (47.6 mmol, 43.3%).

Step (c) Preparation of Bis(3-butenylcyclopentadienyl)zirconium Dichloride

19 ml of 2.5 M (47.5 mmol) butyllithium in mixed C₆ alkane solvent was slowly added to 5.7 g (47.5 mmol) 3-butenylcyclopentadiene prepared according to step (b) above in 50 ml THF cooled to 0°C and stirred for 1 hour. The lithium 3-butenylcyclopentadienylide solution produced was added to 4.43 g (19.0 mmol) zirconium tetrachloride in 50 ml THF cooled to 0°C and stirred for 65 hours. The volatiles were removed under vacuum and the residue extracted with ether and filtered. The product was precipitated as a microcrystalline white solid upon slow cooling of the solution to -50°C. Recrystallisation from cold ether (-12°C) yielded 1.54 g of spectroscopically pure product (¹H NMR) as colourless needles (3.65 mmol, 20.2%).

Example 2: Preparation of Bis(3-propenylcyclopentadienyl)zirconium Dichloride

Step (a) Preparation of 3-Propenylcyclopentadiene

To a rapidly stirred solution of allylbromide (42.739; 0.35mol) dissolved in dry THF (200ml) at 0°C was added a solution of sodium cyclopentadiene (220ml, 2.0M; 0.44mol) in THF. The reaction was stirred for 2hrs during which time it was allowed to warm to room temperature. Iced water (1500ml) was added and the organic product extracted with diethyl ether (3x400ml). The combined organic fractions were dried over magnesium sulphate overnight, filtered and the solvents removed under reduced pressure using a rotary evaporator to yield a pale brown oil. The crude product was distilled under reduced pressure (b.p. 35-45 °C @ 17 mm Hg) to give 11.17g of a colourless oil (0.105mol, 33.3%).

Step (b) Preparation of bis (3-propenylcyclopentadienyl)zirconium Dichloride

Methyl lithium solution (75.25ml, 1.4M; 0.105mol) in diethyl ether was slowly added to a rapidly stirred solution of propenylcyclopentadiene (11.17g, 0.105mol) in dry diethyl ether at 0°C. The reaction was warmed to room temperature and stirring continued until gas evolution had ceased. The precipitated lithium propenylcyclopentadienylide was isolated by filtration, washed with diethyl ether (2x100ml) and pumped to dryness to give 10.65g (0.095mol) of fine white powder. To a rapidly stirred THF solution (100ml) of the lithium propenylcyclopentadienylide at 0°C was added zirconium tetrachloride (11.099, 47.5mmol) dissolved in dry THF (100ml). The reaction mixture was allowed to warm to room temperature and was stirred for 16 hrs. The volatiles were removed under vacuum and the residue extracted with diethyl ether (4x100ml) and filtered. The product was obtained as a microcrystalline white solid upon slow cooling of the solution to -78°C. Recrystallisation from cold ether yielded 13.33g of spectroscopically pure product (¹H NMR) as colourless needles (35.8 mmol, 75.4%).

15 Examples 3-6 Polymerisation of Ethylene

The polymerisation reaction was carried out in a 100 litre bench reactor using 25 litres of isobutane as diluent. The total pressure maintained throughout the reaction was 2.07 MPa (300 psi). The reaction was carried out at 60°C.

20 The reactor was heated to 100°C and purged with dry nitrogen to attain a dry inert atmosphere. 25 litres of isobutane was then added to the reactor, followed by an appropriate amount of hydrogen. The reactor was then pressurised up gradually to the operating pressure of 2.07 MPa (300 psi) with stirring:

A quantity of trimethyl aluminium co-catalyst in toluene (2M, 5.5ml) containing the metallocene complex as prepared according to Example 1 was added to the reactor and stirred under a blanket of ethylene. TiCl₄ supported on MgCl₂ (Ziegler Natta catalyst as described in Example 1 of GB 1359547) was then injected into the reactor. The contents of the reactor were stirred for 20 minutes at 100°C. Methyl aluminoxane (55 cm³, 2M with respect to aluminium, Examples 3-5; 85 cm³, 2M with respect to aluminium, Example 6) was then added and the polymerisation left to continue for a further 40 minutes at 100°C. The reaction was terminated by purging with nitrogen and adding acidified methanol. The reactor contents were then vented to leave a slurry from which dry white polymer was isolated by filtration, washed with methanol and vacuum dried. The Melt Indices (MI, HLMI, MIR) and molecular weights were determined as described above.

The process was repeated in Comparative Examples (CE1 and 2) in which the Ziegler Natta catalyst (and Me₃Al) or the metallocene complex (and MAO) respectively were absent.

The process details and properties of the polymer obtained are given in Table 1.

35

Examples 7 - 9 Preparation of Metallocene containing Polymer

40 A solution of MAO in toluene was added to the metallocene and the solution stirred to dissolve the metallocene. The mixture was heated to 50°C and ethylene introduced at a measured flow rate. After the ethylene flow was stopped the mixture was filtered and the solid polymer washed with 5x25 aliquots of toluene at room temperature.

A sample of each polymer (0.5 - 1g) was transferred anaerobically to a round bottom flask. 100ml toluene was added and the mixture stirred while the flask was heated to 100°C for 3 hrs resulting in a clear pale yellow solution. The flask was cooled to room temperature resulting in reprecipitation of the polymer. The solution was filtered and the polymer washed with 5x25 aliquots of toluene at room temperature.

45 The preparative details for each polymer and the zirconium content before and after toluene washing are given in Table 2.

Due to the high solubility of the free metallocene complex in toluene the zirconium content before and after washing indicates that the metallocene complex has been incorporated into the polymer.

50

Example 10 Preparation of Ziegler Catalyst

55 19.65g of Crossfield ES70 (calcined at 800°C for 5 hrs in flowing nitrogen) was slurried in 200ml n-hexane and a solution of 29.5ml (1M) dibutylmagnesium in n-hexane added during 1 hr with stirring at ambient temperature. The reaction was continued for a further hour and the slurry filtered. The residue was washed with n-hexane and filtered and the washing repeated twice before solvent traces were removed from the residue under vacuum at ambient temperature.

The residue was stirred with 200ml n-hexane and a solution of 2.78g tert-butyl chloride in 30ml n-hexane

added over 1 hr with stirring at 50°C. The reaction was continued for a further 1 hr and filtered and washed. The residue was re-slurried in 200 ml n-hexane and 0.153g titanium tetrachloride in 30 ml n-hexane added over 1 hr with stirring at ambient temperature. The reaction was continued for a further 1 hr. followed by filtration and re-slurrying in 200 ml n-hexane. A solution of 1.082g titanium butoxide in 30ml n-hexane was added over 1 hr. with stirring at ambient temperature. The reaction was continued for a further hour before filtration and washing with 200ml n-hexane. The filtration and washing was repeated twice more before the residue was obtained free from solvent under vacuum at ambient temperature. The titanium loading of the catalyst was 1.21% w/w.

Example 11 Preparation of Supported Polymer

0.6g of the polymer prepared according to Example 9 was dissolved in 20 ml toluene at 80°C and added to 3.05g of the silica supported Ziegler catalyst prepared according to Example 10 with stirring. The solvent was removed under vacuum while maintaining the temperature at 80°C to yield a white, free-flowing powder having 0.12% w/w Zr.

Examples 12-13 Polymerisation of Et hylene

Supported polymer as prepared in Example 11 was added to a 3 litre reactor containing 1.5 litres isobutane and 9.6 mmol MAO (4 ml of 2.4M toluene Solution). Hydrogen was introduced at the required pressure and the temperature raised to 75°C. Ethylene was introduced to maintain a constant total pressure of 28.1 bar and the reaction continued for 1 hr. before quenching by venting to atmospheric pressure and the addition of 2-propanol. Details and polymerisation results are given in Table 3.

From the Table it can be seen that the catalyst compositions using a polymer of the metallocene complex have high activity and lead to broad molecular weight polymers.

TABLE 1

Example	Catalyst Concentration	H ₂ (psia)	MI (2.16)	HLM1 (21.6)	MIR	M _n	M _w	Bimodal Mol wt Distbn.	M _w /M _n Poly- disper.
3	A (1.1 mM Ti)	50	0.12	4.46	37.2	1200	220000	Yes	183.3
	B (45 mg)								
4	A (1.1 mM Ti)	100	0.98	52.7	53.9	1100	170000	Yes	154.5
	B (45 mg)								
5	A (0.3 mM Ti)	20	0.015	1.06	70.6	2100	291000	Yes	138.6
	B (45 mg)								
6	A (0.3 mM Ti)	20	0.317	1803	5687	2400	189000	Yes	80.1
	B (70 mg)								
CE1	A (O)	20	Very high	Very high		1300	14400	No	11.1
	B (45 mg)								
CE2	A (0.6 mM Ti)	20		0.13		72000	566000	No	7.9
	B (O)								

A : MgCl₂/TiCl₄ catalyst

B : Zirconium compound from Example 1

MIR: Melt Index Ratio

MI : Melt Index

TABLE 2



Example	Metallocene	Quantity /mmol	MAO /mmol	Solvent /ml	C ₂ flow Rate /ml/min	Reaction Time /h	Polymer Yield /g	Zr Content/%	
								Before Washing	After Washing
7	Propenylzirconium Dichloride	4	240	40	33	6.17	9	0.87	0.76
8	Propenylzirconium Dichloride	4	240	40	6.5	21.17	4.4	0.70	0.70
9	Propenylzirconium Dichloride	4	240	40	30	6	9.8	0.68	0.74

TABLE 3

Amount /g	Hydrogen /psi	Polymer Yield /g	Activity /gPE/gcat.h.b (/gPE/mmol M. h.b.)	HLMI/MI/MIR	M_w	M_w/M_n
0.193	20	105.5	49.7 (224.1)	6.1/0.04/141	430,000	271
0.178	2	87.1	38.0 (171.4)	18.6/0.26/73	454,000	25.1

Claims

1. A catalyst composition for use in the polymerisation of olefins characterised in that it comprises at least one polymerisation catalyst and at least one metallocene complex of general formula I or II



(II)

wherein R is a univalent or divalent 1-20C hydrocarbyl, or a 1-20C hydrocarbyl containing Substituent oxygen, silicon, phosphorus, nitrogen or boron atoms with the proviso that, at least one R group contains a polymerisable group and preferably contains at least three carbon atoms, and when there are two or more R groups present they may be the same or different, and when R is divalent it is directly attached to M, and replaces a Y ligand, wherein

X is an organic group containing a cyclopentadienyl nucleus,

M is a Group IVA metal,

Y is a univalent anionic ligand and

for formula I,

n is an integer of 1 to 10

x is either 1 or 2, and

when x = 1, p = 0 - 3,

when x = 2, p = 0-2,

and for formula II,

n, m and l are integers or 0 such that $n + m + l \geq 1$, p = 0-2, and

Z is a C₁ to C₄ alkylene radical or a dialkyl germanium or silicon or an alkyl phosphine or amine radical or bis-dialkylsilyl or bis-dialkylgermanyl containing hydrocarbyl groups having 1 to 4 carbon atoms bridging the cyclopentadienyl nuclei.

2. A catalyst composition according to claim 1 wherein the polymerization catalyst is selected from a Group IVA, VA or VIA metal compound or a Ziegler Natta catalyst.
3. A catalyst composition according to claim 1 or 2 wherein M in general formula I or II is zirconium.
4. A catalyst composition according to any of the preceding claims wherein the polymerisable group is an olefinic group.
5. A catalyst composition according to claim 4 wherein the olefinic group is a vinyl group.
6. A catalyst composition according to any of the preceding claims wherein the polymerisation catalyst and/or the metallocene complex are supported on an inorganic support.
7. A catalyst composition according to claim 6 wherein the inorganic support is selected from silica, alumina and/or a Group II metal halide.
8. A catalyst composition for use in the polymerisation of olefins comprising at least one polymerisation catalyst and at least one polymer of at least one metallocene complex of general formula I or II as described in claim 1.
9. A catalyst composition according to claim 8 wherein the polymer comprises at least one olefin and at least one metallocene complex.
10. A catalyst composition according to either claim 7 or 8 wherein the polymerisation catalyst and polymer are supported on an inorganic support.
11. A catalyst composition according to any of the preceding claims further comprising a cocatalyst.
12. A catalyst composition according to claim 11 wherein the cocatalyst is a Group IA, IIA, IIB or IIIB organo-metallic compound.
13. A catalyst composition according to claim 12 wherein the cocatalyst is an organoaluminium compound.
14. A process for preparing the polymer according to claim 9 characterised in that the metallocene complex and olefin are contacted together in the presence of an inert solvent and/or a cocatalyst.
15. A process for preparing the catalyst composition according to claim 9 characterised in that the metallocene complex, olefin and the polymerisation catalyst are contacted together in the presence of an inert solvent and/or cocatalyst.
16. A process for preparing the catalyst composition according to claim 9 characterised in that polymer is dis-

solved in an inert solvent and deposited on the polymerisation catalyst supported on an inorganic support.

17. A process for the polymerisation of olefins comprising contacting at least one olefin monomer with a catalyst composition according to any of the claims 1 to 13 or prepared according to either claim 15 or 16.

5

18. A process according to claim 17 wherein the polymerisation is carried out in the gas phase.

19. A process according to either of claims 17 or 18 wherein the olefin monomer is ethylene.

10

15

20

25

30

35

40

45

50

55

FIG. 1


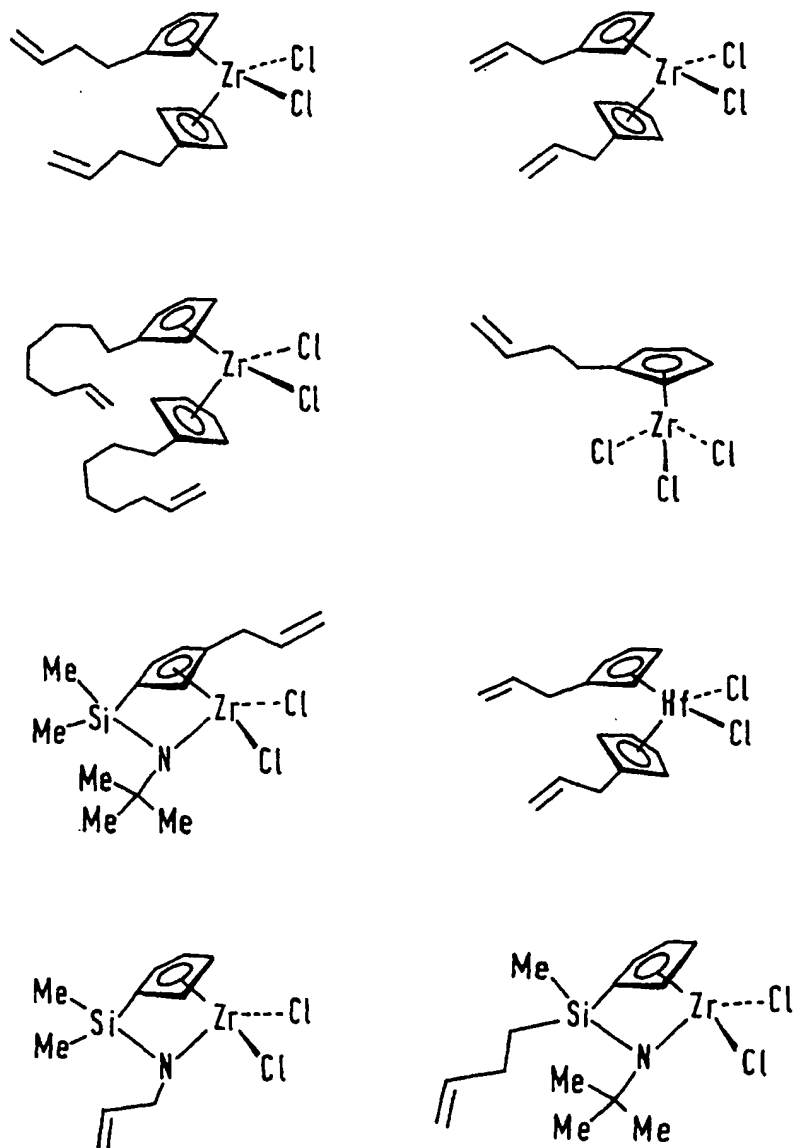


FIG. 2



EP 0 586 168 AI

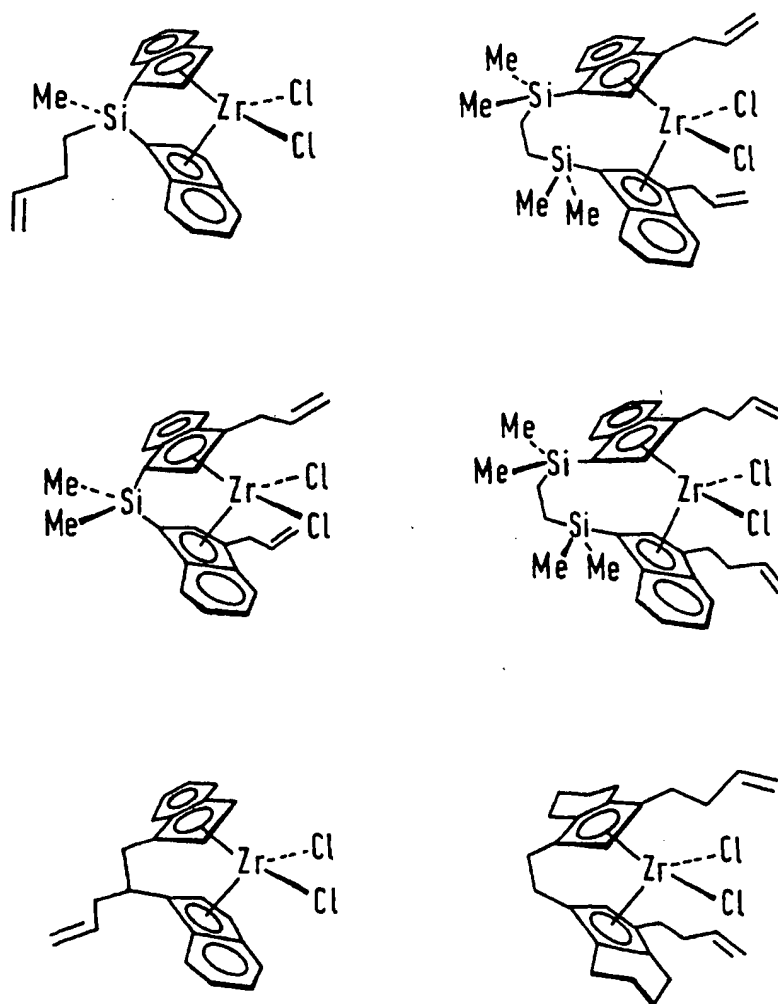

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 93 30 6666

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cls)
	<p>P-A-0 496 193 (HOECHST) the whole document *</p> <p>P-A-0 372 414 (HOECHST) the whole document *</p>		<p>08F10/00</p>
			<p>TECHNICAL FIELDS SEARCHED (Int.Cls)</p> <p>08F</p>
<p>The present search report has been drawn up for all claims</p>			
Place of search		Date of completion of the search	
THE HAGUE		25 November 1993	
		Examiner	
		De Roeck, R	
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			